



# Product data sheet

COMPASS  
03.3520/QR-111/75W/24°  
FLOS

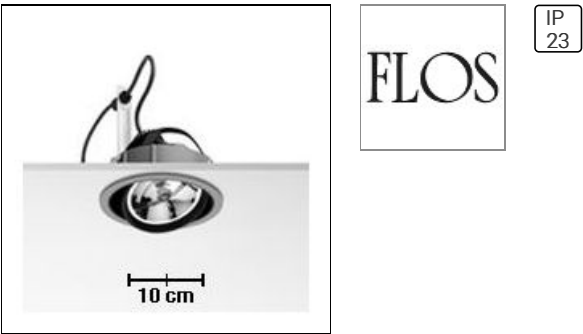

Luminaire for halogen and high-pressure discharge lamps. Injection-moulded aluminium reflector body with powder-coated finish. Lamp support with die-cast aluminium, black powder-coated heat dissipating element. Thermoplastic recessed ring and screening ring, die-cast aluminium, black powder-coated anti-glare ring. 4 mm. tempered glass cover. Stainless steel fixing brackets.

## Light output 1

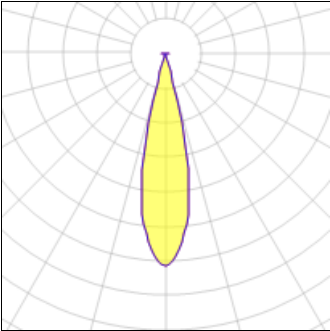

### 1 x Halogen low voltage lamp without reflector

Nominal lamp power	75 W	Socket	G53
Lamp flux	871 lm	LOR	100%
Luminous efficacy	12 lm/W	Total flux	871 lm
CCT	3000 K	Total power	75 W
CRI	99		

## Mounting mode

Ceiling recessed

## Shape and measurements

Height: 8.66 in  
Diameter: 6.38 in

## Adjustability

Tiltable

## Electric

System power: 75 W

## Protection

IP: 23