



Product data sheet

RIM LED COMPACT 4000 PLX E 34 IP44 840
19.4346.3111.34
LUXIONA

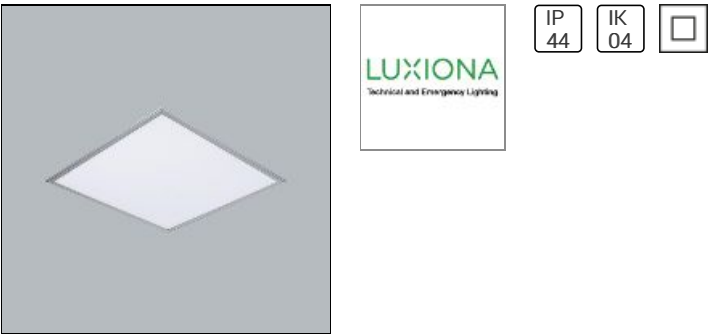

Indoor luminaire. Assembly: mounted in module ceilings as well as plasterboard ceilings, directly mounted to ceiling construction and surface mounted on slings using accessories. The body material is aluminum. Colour - RAL 9016 (white). Luminaire dimensions: 595 x 595 x 10 mm. Weight 3,1 kg. Diffuser: PLX (PMMA opal). The efficiency of the optical system is 100,00%. Beam angle: (C0-C180) / (C90-C270) - 113° / 110,6°. Light source type: LED. Colour of the light 4000 K. SDCM=6. CRI>80. Lifetime of LED sources: 54000 h L80/B10. Luminaire luminous flux: 4258,8 lm. Power of luminaire: 34,2 W. Luminaire's light efficiency: 124,5 lm/W. Driver: standard on/off (E). Voltage 220..240 V, 50..60 Hz. Power factor cosp: >0,95. Circuit load capacity: 23 (B10), 37 (B16), 38 (C10), 62 (C16). Operating temperature range: 5 ÷ 30° C. Protection degree: IP20/44. Impact resistant: IK04. Protection against electric shock: II. Photobiological risk class (IEC/EN 62471): RG0.

Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	34.2 W	CRI	80
Total flux	4137 lm	LOR	83%
Luminous efficacy	121 lm/W	Total power	34.2 W

Mounting mode

Ceiling recessed

Shape and measurements

Length: 23.43 in

Width: 23.43 in

Height: 0.39 in

Adjustability

Fixed

Design

Color of housing: White

Electric

System power: 34.2 W

Appliance Class: II

Protection

IP: 44

IK: 04

Other operating numbers

Ambient temperature range: 41...86°F