



Product data sheet

RFS530-CMH39/T6 [M]
661-5354
WE-EF

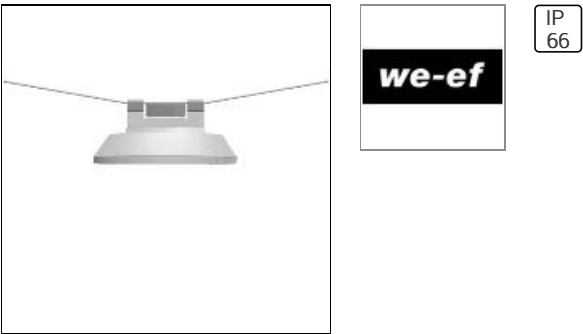

IP66. Cantenary mounted luminaire. Internal gear control on hinged, 'tool-less' removable gear tray.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	35 W	Socket	G12
Lamp flux	3300 lm	LOR	82%
Luminous efficacy	63 lm/W	Total flux	2713 lm
CCT	3000 K	Total power	43 W
CRI	85		

Mounting mode

Pendant

Shape and measurements

Height: 4.13 in
Diameter: 18.11 in

Electric

System power: 43 W

Protection

IP: 66