



Product data sheet

ISARO 140W HIT-DGE CL1 PC MA76 /L
96261632
THORN LIGHTING

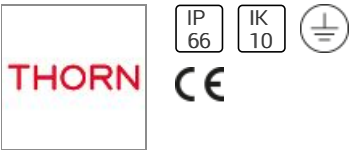

A road and street lantern, designed for durability, for 1 x 140W CPO-TW lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK10. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: shallow polycarbonate. Suitable for post top mounting on Ø76mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Complete with lamp. Total power: 153 W Dimensions: 602 x 282 x 195 mm Weight: 5.42 kg Scx: 0.069 m²

Light output 1



1 x General service incandescent lamp

Nominal lamp power	140 W	LOR	79%
Lamp flux	16500 lm	Total flux	12978 lm
Luminous efficacy	85 lm/W	Total power	153 W
CCT	3000 K		
CRI	66		

Mounting mode

Pole top mounted

Shape and measurements

Length: 23.70 in
Width: 11.10 in
Height: 7.68 in
Weight: 5.4 kg

Design

Material impression: Aluminum
Color of housing: Silver gray

Electric

System power: 153 W
Voltage: 220-240 V AC
Appliance Class: I

Protection

IP: 66
IK: 10
Designation labels: CE