



Product data sheet

ALTIS HR 2KW R1 HQITS-S CL1 WI
96263388
THORN LIGHTING

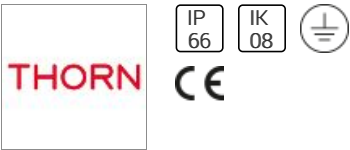

A high performance discharge floodlight for 1 x 2000W HIT-DE OSS lamp. magnetic. Class I electrical, IP66. Body and frame: die-cast aluminium unpainted. Enclosure: 4mm thermally toughened glass. Stirrup fixed by single bolt through Ø22mm hole, or 105x17mm oblong hole, or by twin bolts through Ø15mm holes. Cable gland for 8 to 12mm cable. Aiming via integrated sights. Ideal for sports field and stadium lighting. Complete with hot restrike ignitor box. Gear tray to be ordered separately. Lamp to be ordered separately. Total power: 2075 W
Dimensions: 566 x 626 x 285 mm Weight: 16.7 kg Scx: 0.21 m²

Light output 1



1 x General service incandescent lamp			
Nominal lamp power	2000 W	LOR	81%
Lamp flux	200000 lm	Total flux	162074 lm
Luminous efficacy	78 lm/W	Total power	2075 W
CCT	3000 K		
CRI	99		

Mounting mode

Ceiling mounted

Shape and measurements

Length: 22.28 in
Width: 24.65 in
Height: 11.22 in
Weight: 16.7 kg

Design

Material impression: Aluminum

Electric

System power: 2075 W
Voltage: 380-415 V AC
Appliance Class: I

Protection

IP: 66
IK: 08
Designation labels: CE