



Product data sheet

ECLDISPLAY
ECLDISPLAYDAT_3000K_WASH2550 MAX ZOOM_WHITE
PROLIGHTS

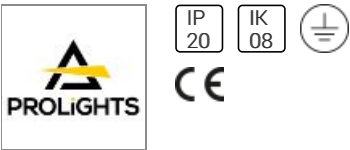

EclDisplay is a range of revolutionary and flexible LED spotlights designed for galleries, commercials and any public venue where an advanced but classy fixture, with several control options, sources and optic versions available to precisely meet any application. The EclDisplay DAT can be set and addressed through RDM, and includes a broad set of on-board input control options: DMX, DALI Type 6 or local knob dimming control. The EclDisplay DAT includes a high-efficiency 25 W White, high CRI LED source, available in 2.700 K, 3.000 K, 4.000 K, 5.600 K variants, and it is completed with a wide selection of optional zoomable profile or wash lenses, and other optical accessories like louvres and snoots, making it truly a multi-purpose fixture. Features: Data control through RDM, DMX, DALI Type 6 and local knob dimming 25W high CRI White LED available in 2.700 K, 3.000 K, 4.000 K, 5.600 K versions, both black and white housing Multiple lens options: zoomable profile or wash optics

Light output 1



1 x LED			
Nominal lamp power	33.9 W	LOR	100%
Lamp flux	1849 lm	Total flux	1853 lm
Luminous efficacy	55 lm/W	Total power	33.9 W
CCT	3045 K		
CRI	90		

Mounting mode

Ceiling mounted, Contact rail, Standing / Bollard

Shape and measurements

Length: 5.55 in
Width: 3.35 in
Height: 7.51 in

Adjustability

Rotatable, Tiltable, Free

Electric

System power: 33.9 W
Controller: DMX, DALI
Color adjustable
Appliance Class: I

Protection

IP: 20
IK: 08
Surface temperature: 65°C
Designation labels: CE