



Product data sheet

IMPACTF2 1X58W T26 HFD E3 L840
96234341
THORN LIGHTING

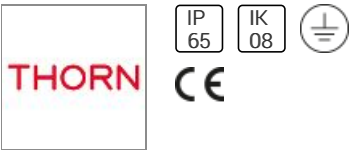


A high performance IP65 dust and moisture resistant luminaire with a high impact resistance. For 1 x 58W T26 lamp(s) with electronic - digital dimmable Slave luminaire for DSI control (other than DALI) circuit and integral 3 hour manual test emergency lighting function. Class I electrical. Canopy in light grey glass fibre reinforced polyester. Diffuser in polycarbonate with internal prisms. For surface or suspended mounting. Quick-fix installation brackets are supplied for surface mounting, optional accessory kits are available to help with other mounting options. Complete with 840 lamp(s). Dimensions: 1594 x 112 x 112 mm Total power: 56 W Weight: 4.08 kg

Light output 1 (emergency)



1 x General service incandescent lamp			
Nominal lamp power	58 W	LOR	75%
Lamp flux	231 lm	ULOR	16%
Luminous efficacy	27 lm/W	Total flux	174 lm
CCT	3000 K	Total power	6.5 W
CRI	80		

Light output 2



1 x General service incandescent lamp			
Nominal lamp power	58 W	LOR	75%
Lamp flux	5200 lm	ULOR	16%
Luminous efficacy	70 lm/W	Total flux	3911 lm
CCT	3000 K	Total power	56 W
CRI	80		

Mounting mode

Ceiling mounted

Shape and measurements

Length: 62.76 in
Width: 4.41 in
Height: 4.41 in
Weight: 4.1 kg

Electric

System power: 62.5 W
Voltage: 230-240 V AC
Appliance Class: I

Information regarding emergency functions

Supplementary emergency lighting
Emergency sign: N/A

Design

Material impression: Plastic

Protection

IP: 65

IK: 08

Designation labels: CE