



Product data sheet

ETC130-GB[EE.ASC10] VA:IP67:HIT-TC-CE-35W/PGJ5
185-2657
WE-EF

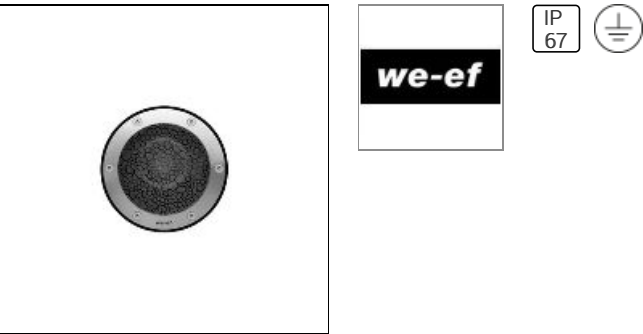

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection. 'No tool' removable gear/reflector tray. Anodised aluminium reflector, gimbal mounted, 360° rotatable and 30° tilt. Integral Cool Touch Adaptor CTA® for reducing glass surface temperature. The optional installation blackout is recommended for mounting. To be ordered separately.

Light output 1



| | | | |
|-----------------------|---------|-------------|---------|
| 1 x Metal halide lamp | | | |
| Nominal lamp power | 35 W | Socket | Pgj5 |
| Lamp flux | 3800 lm | LOR | 44% |
| Luminous efficacy | 39 lm/W | ULOR | 44% |
| CCT | 3000 K | Total flux | 1677 lm |
| CRI | 85 | Total power | 43 W |

Mounting mode

Floor recessed

Shape and measurements

Height: 10.43 in
Diameter: 9.84 in

Electric

System power: 43 W
Appliance Class: I

Protection

IP: 67