



# Product data sheet

EDGE W 18L 1 X 12.6W 50° 4000 K  
GH1644.ENFT400EN  
GHIDINI

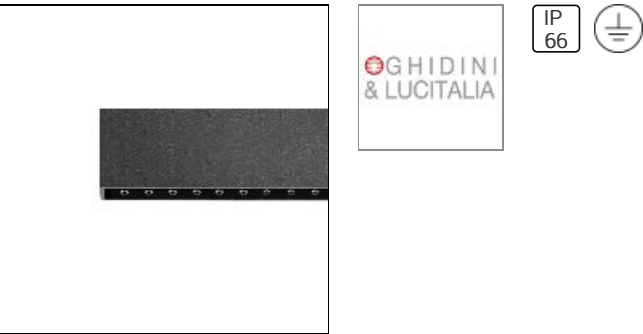

Series of linear wall luminaires characterized by excellent visual comfort. Available in various lengths. Designed for the lighting of both internal and external environments thanks to the wide availability of optics and powers. The construction of the body and the closing caps of the diffuser are in aluminum alloy with high resistance to oxidation subjected to treatment with nano-bonderite and textured polyester powder coating, making the product resistant to atmospheric agents and UV rays, guaranteeing maximum protection. During the years. The silicone gaskets ensure maximum sealing in all operating conditions and temperatures. The ultra-transparent tempered sodium-calcium glass diffuser that guarantees maximum light transmittance is finished with a silk-screened border. The product is installed thanks to the fixing system with sliding steel plate. The back of the product consists of a channel to house the cables and allow for easy connection.

## Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	37.8 W	CRI	90
Total flux	3037 lm	LOR	100%
Luminous efficacy	80 lm/W	Total power	37.8 W

## Mounting mode

Wall mounted

## Shape and measurements

Length: 35.43 in

Width: 1.69 in

Height: 3.54 in

## Adjustability

Fixed

## Electric

System power: 37.8 W

Appliance Class: I

## Protection

IP: 66