



# Product data sheet

VFL540-SE [A60] IP66:LED-48/144W/3K + LS180  
108-2078  
WE-EF

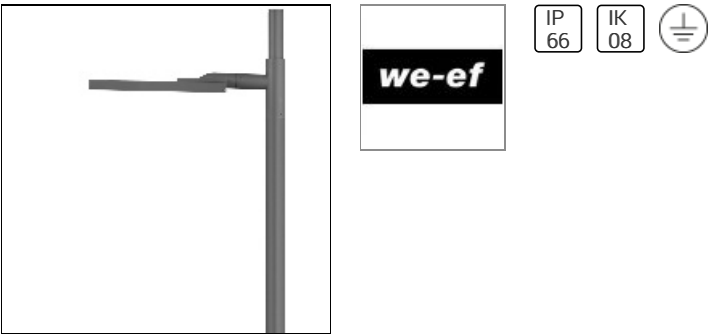

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RF® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Recommended mounting height 3.0-6.0 m, depending on lamp type selected.

## Light output 1



48 x LED			
Nominal lamp power	3 W	LOR	69%
Lamp flux	430 lm	Total flux	14266 lm
Luminous efficacy	90 lm/W	Total power	159 W
CCT	3000 K		
CRI	80		

## Mounting mode

Pole integrated

## Shape and measurements

Length: 11.81 in  
Width: 26.77 in  
Height: 3.58 in  
Weight: 8.2 kg

## Electric

System power: 159 W  
Appliance Class: I

## Protection

IP: 66  
IK: 08