



Product data sheet

X-LINE PRO COMPACT 8000 MICRO-PRM EDD 34 830 LINE / L-2250MM
19.4437.2513.34
LUXIONA

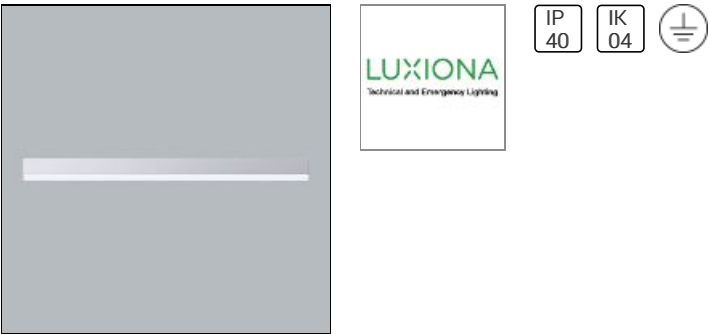

Indoor luminaire. Assembly: directly mounted to ceiling construction or surface mounted on slings using accessories. The body material is aluminum. Colour - RAL 9016 (white). Dimensions: 2250 x 60 x 72 mm. Diffuser: Micro-PRM (micro-prismatic diffuser PMMA). The efficiency of the optical system is 67,30%. Beam angle: (C0-C180) / (C90-C270) - 79,4° / 87,8°. Light source type: LED. Colour of the light 3000 K. SDCM=3. CRI>80. Lifetime of LED sources: 90000 h L80/B10. Luminaire luminous flux: 5760,9 lm. Power of luminaire: 50,5 W. Luminaire's light efficiency: 114,1 lm/W. Driver: DIM DALI (EDD). Voltage 220..240 V, 50..60 Hz. Power factor cosφ: >0,95. Circuit load capacity: 14 (B10), 23 (B16), 22 (C10), 35 (C16). Operating temperature range: 5 ÷ 35° C. Protection degree: IP40. Impact resistant: IK04. Protection against electric shock: I. Photobiological risk class (IEC/EN 62471): RG0.

Light output 1



1 x LED			
Nominal lamp power	50.5 W	LOR	52%
Lamp flux	8560 lm	ULOR	26%
Luminous efficacy	170 lm/W	Total flux	4488 lm
CCT	3000 K	Total power	50.5 W
CRI	80		

Mounting mode

Ceiling mounted

Shape and measurements

Length: 88.58 in

Width: 2.36 in

Height: 2.83 in

Adjustability

Fixed

Design

Color of housing: White

Electric

System power: 50.5 W

Controller: DALI

Appliance Class: I

Protection

IP: 40

IK: 04

Other operating numbers

Ambient temperature range: 41...95°F