



Product data sheet

EVC310-FS [EE] VA:IP67:LED-3/6W/3K + IO-180°
185-9936
WE-EF

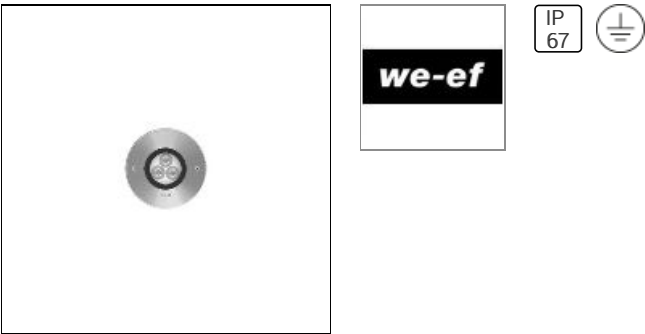

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factorysealed termination chamber with cable gland and 0.5 m of flexible PVC-free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD- optimised optics for superior illumination and glare control. Luminaire requires installation blackout and sealable junction box, which are included in supply. ASC Anti Slip Coating on request.

Light output 1



3 x LED			
Nominal lamp power	2 W	LOR	70%
Lamp flux	246 lm	ULOR	70%
Luminous efficacy	67 lm/W	Total flux	515 lm
CCT	3000 K	Total power	7.7 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Height: 3.94 in
Diameter: 4.53 in

Electric

System power: 7.7 W
Appliance Class: I

Protection

IP: 67