



Product data sheet

RECESSED DOWNLIGHT MEDRA 9W 730LM CRI > 80 4000K ALU BRUSHE
2003.4060 - MEDRA DL CR90 LED730-840 110 ALBR DALI
REGENT

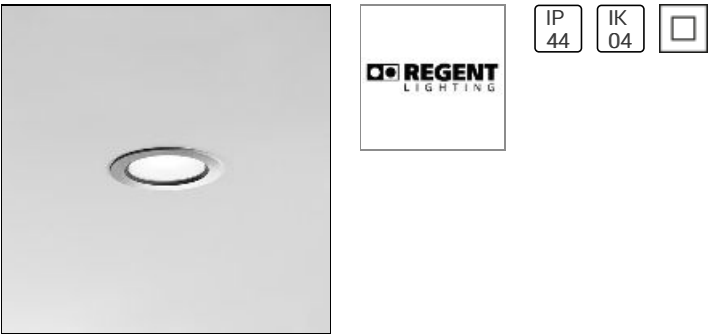

Recessed downlight Medra with LED, system power: 9 W, standby power 0.5 W, luminous flux of luminaire 730 lm, colour rendering index CRI > 80, colour temperature 4000 K, neutral white, colour tolerances SDCM 3, lifetime LED L70 50'000 h, photobiological safety: the luminaire poses no danger (RG0), 230 V, direct light emission, housing in aluminium, with ceiling trim, alu brushed, wide beam, 110°, operating unit included in delivery, DALI2, protection class II, ingress protection IP20 / IP44, glow wire test 850 °C, impact strength: IK 04 this product contains a light source of energy efficiency class C Ø = 102 mm, DAØ = 90 mm, ET = 47 mm

Light output 1



1 x LED			
Nominal lamp power	8 W	LOR	100%
Lamp flux	730 lm	Total flux	730 lm
Luminous efficacy	91 lm/W	Total power	9 W
CCT	4000 K		
CRI	80		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 1.85 in
Diameter: 4.02 in
Weight: 0.3 kg

Adjustability

Fixed

Design

Color of housing: Silver gray

Electric

System power: 9 W
Appliance Class: II

Protection

IP: 44
IK: 04