



Product data sheet

ECOFIT OPTICELL 59,5 X 59,5 EMERGENCY
AQ11-3PW8F30314
LEDSC4

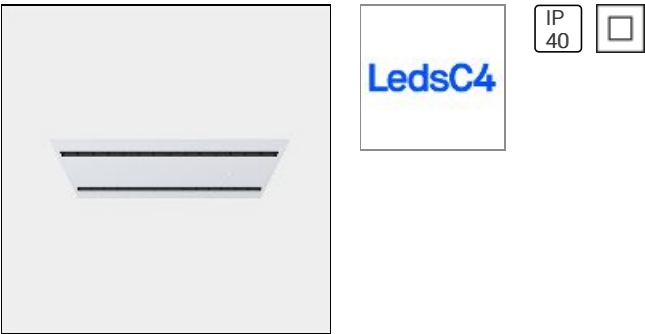

LedsC4 Ecofit Opticell 59,5 x 59,5 Emergency AQ11-3PW8F30314 Downlight for indoor use. Structure material: Aluminium. Structure finish: White. Diffuser material: Methacrylate. Diffuser finish: Semitransparent. Warranty: 5 Years. Product net weight (Kg): 4.52 Product length (mm): 595 Product width or diameter (mm): 595 Product height (mm): 52 Class 2. Luminaire not suitable for coating with insulation materials. IP: IP40. LED. No. of lampholders or LEDs: 1. LED brand: TRIDONIC. Driver brand: TRIDONIC. Maximum power of light source: 29.3W. Colour temperature: 3000K. Colour rendering index: 80. MacAdam Steps: 3. Hours of life: 50.000h L80B20. UGR: 12.6. Photobiological risk: RG1. % de Flickering: +/- 5%. Real flux (lm): 4402. Real lm/W: 136. Voltage / frequency range: 198-264/50-60Hz. Voltage: 40. Equipment included: Yes. Total power: 32.3. Power factor: 0.90. Dimmable equipment included: ON-OFF.

Light output 1



1 x LED			
Nominal lamp power	32.3 W	LOR	100%
Lamp flux	4402 lm	Total flux	4401 lm
Luminous efficacy	136 lm/W	Total power	32.3 W
CCT	3000 K		
CRI	80		

Mounting mode

Ceiling recessed

Shape and measurements

Length: 23.43 in

Width: 23.43 in

Height: 0.08 in

Adjustability

Fixed

Electric

System power: 32.3 W

Appliance Class: II

Protection

IP: 40