
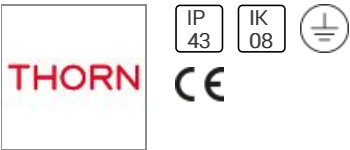



Product data sheet

HIPAK PRO LED18500-740 HFI-X ASY SPRT
96642950
THORN LIGHTING



A LED High Bay luminaire with asymmetrical distribution. Electronic, DALI dimmable control gear. Class I electrical, IP43, IK08. Housing: anodised aluminium extrusion. End caps: painted steel (close to RAL 9006). Reflector: high grade aluminium. Front cover: polycarbonate, 4mm thick. Mounting kits to be ordered separately. Electrical connection via piano key terminal block behind sliding cover. Complete with 4000K LED. Dimensions: 756 x 271 x 92 mm Total power: 152 W Weight: 8.8 kg

Light output 1 (integrated)



Lamp type	LED	CCT	3000 K
Nominal lamp power	152 W	CRI	80
Total flux	18500 lm	LOR	100%
Luminous efficacy	122 lm/W	Total power	152 W

Mounting mode

Pendant

Shape and measurements

Length: 29.76 in
Width: 10.67 in
Height: 3.62 in
Weight: 8.8 kg

Design

Material impression: Aluminum
Color of housing: Silver gray

Electric

System power: 152 W
Voltage: 220-240 V AC
Controller: DALI
Appliance Class: I

Protection

IP: 43
IK: 08
Designation labels: CE