



Product data sheet

SUP2 S 3/LED350-930 WFL LDO BK
42927556
ZUMTOBEL

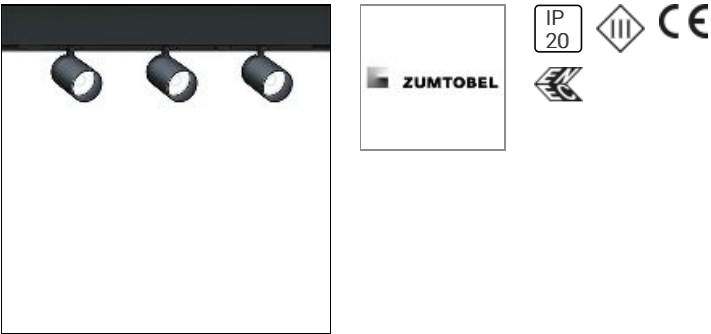

LED spotlight module with three LED spotlight units, "mini" construction size; equipped with lens system for high quality accent lighting in museums and exhibitions spaces; combination of LED PCBs, lens and film creates uniform light distribution with high intensity and soft transitions, without stray light from the light cone; Luminaire with low voltage adapter for Zumtobel SUPERSYSTEM II (48 V) low voltage track; adapter is fixed without tools and contains electronics converting the constant voltage (48V) to constant current; lamp(s): 3/5W, Colour rendering Ra > 90, colour temperature 3000 K; Luminaire with WIDE FLOOD light distribution; colour tolerance: SDCM 2 initial, LED PCBs premium-selected; Luminaire luminous flux: 837 lm, Luminaire efficacy: 56 lm/W; service life: 50000h for luminous flux at 90% of initial value; dimming of illuminance 5-100%, Slave luminaire for DALI control (DALI only); lamp unit can rotate through 360° and tilt through 90°; lamp unit of die-cast aluminium, coated black; optic consists of glass lens and film of plastic; front ring is for glare reduction and accommodating films; total power: 15 W; dimensions: 230x26x66 mm; weight: 0.16 kg; Note: Film can be replaced to achieve other light distribution patterns; ring louvre or the extended anti-glare cylinder can be exchanged for the front ring.

Light output 1 (integrated)



Lamp type	LED	CCT	3000 K
Nominal lamp power	5 W	CRI	90
Total flux	279 lm	LOR	100%
Luminous efficacy	56 lm/W	Total power	5 W

Mounting mode

Pendant

Shape and measurements

Length: 9.06 in
Width: 1.02 in
Height: 2.60 in
Weight: 0.16 kg

Design

Material impression: Aluminum
Color of housing: Black

Electric

System power: 5 W
Voltage: 48 V DC
Controller: DALI
Appliance Class: III

Protection

IP: 20
Designation labels: CE, ENEC