



Product data sheet

LP CIRCLE RECESSED Ø260 BLACK LED 3000K 13W
5742580744
LOUIS POULSEN

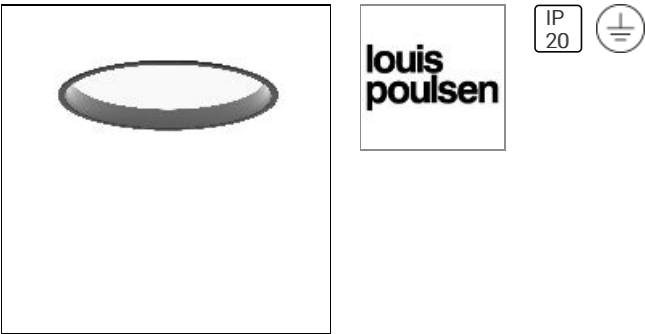

LP Circle Recessed Design: Mikkel Beedholm/KHR arkitekter Concept: The fixture emits diffuse light via a high-efficiency acrylic diffuser. The diffuser, which is encircled by a voluminous coloured or white ring, is hidden when viewed from low angles. Angling the inner side of the ring 5° creates a comfortable and decorative graduation of the light from the diffuser. With two diameters and four different installation options, the lights series can be used for a wide range of applications. Finish: White, Black, Pale Petroleum or Yellow. Powder coated. Material: Reflector: Deep drawn aluminium. Diffuser: Acrylic, frosted. Installation lock: Polyamide. Mounting: Ceiling thickness: 1–40 mm. Driver is a separate unit (supplied with luminaire). Cut-out dimensions: Ø 260: Ø 248mm, Ø 450: Ø 438mm. Looping: Approved, max 5x1.5mm². Weight: Min: 2.2 kg Max: 5.0 kg Class: Ingress protection IP20. Electric shock protection I.

Light output 1 (integrated)



| | | | |
|--------------------|---------|-------------|--------|
| Lamp type | LED | CCT | 3000 K |
| Nominal lamp power | 13 W | CRI | 90 |
| Total flux | 1065 lm | LOR | 100% |
| Luminous efficacy | 82 lm/W | Total power | 13 W |

Mounting mode

Ceiling recessed

Shape and measurements

Length: 10.47 in

Width: 10.47 in

Height: 4.06 in

Adjustability

Fixed

Electric

System power: 13 W

Appliance Class: I

Protection

IP: 20