



Product data sheet

EVC310-FS [EES] VA:IP67:LED-3/6W/3K
185-9937
WE-EF

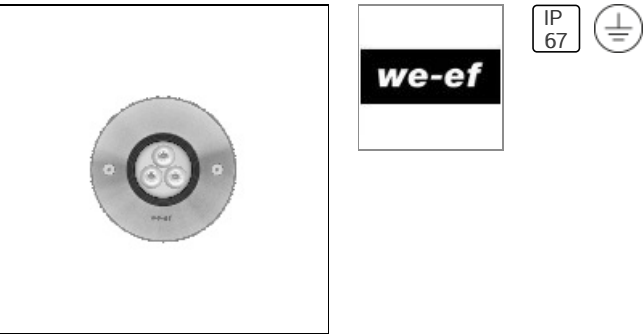

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Luminaire installation blockout and sealable junction box included in supply.

Light output 1



3 x LED			
Nominal lamp power	2 W	LOR	69%
Lamp flux	290 lm	Total flux	601 lm
Luminous efficacy	80 lm/W	Total power	7.5 W
CCT	3000 K		
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Height: 3.94 in
Diameter: 4.53 in
Weight: 2.8 kg

Electric

System power: 7.5 W
Appliance Class: I

Protection

IP: 67