



# Product data sheet

AVN F2 LED 18L70 WST BPSW CL1 D76 L730  
96265445  
THORN LIGHTING

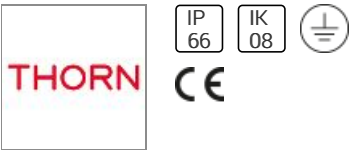

Decorative post-top lantern with street distribution. Equipped with power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Class I electrical, IP66, IK08. Base and arms: die-cast aluminium (LM6), Canopy: spun aluminium, all powder coated dark sandy grey 900 (close to RAL7043). Diffuser: clear polycarbonate. Screw fixings: stainless steel. Supplied complete in one box. Complete with 3000K LED Post top mounted on a spigot of Ø76mm, length 100mm. Dimensions: Ø700/700 x 500 mm Total power: 40 W Weight: 9.2 kg Scx: 0.17 m² Luminaire efficacy: 91 lm/W

## Light output 1 (integrated)



Lamp type	LED	CCT	3000 K
Nominal lamp power	40 W	CRI	70
Total flux	3650 lm	LOR	100%
Luminous efficacy	91 lm/W	ULOR	3%
		Total power	40 W

## Mounting mode

Pole top mounted

## Shape and measurements

Length: 27.56 in  
Width: 27.56 in  
Height: 19.69 in  
Weight: 9.2 kg

## Design

Material impression: Aluminum

## Electric

System power: 40 W  
Voltage: 230 V AC  
Appliance Class: I

## Protection

IP: 66  
IK: 08  
Designation labels: CE