



Product data sheet

DOC220 [BD] IP66:LED-FT-24W/4K
134-1484
WE-EF

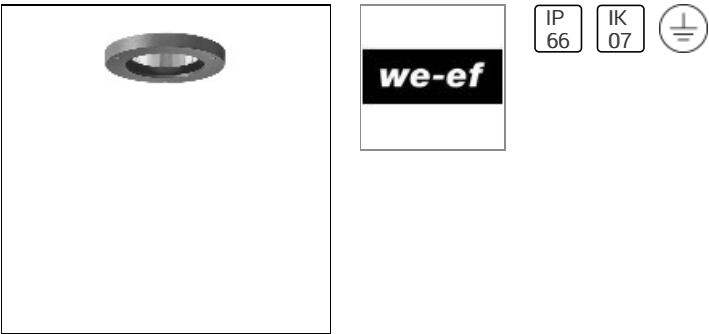

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Anodised aluminium reflector, PMMA-Diffusor-Lens for glare control and soft wide beam distribution. Intergal ECG control gear in thermally separated compartment. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

Light output 1



1 x LED			
Nominal lamp power	24 W	LOR	58%
Lamp flux	4400 lm	Total flux	2534 lm
Luminous efficacy	94 lm/W	Total power	27 W
CCT	4000 K		
CRI	80		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 6.02 in
Diameter: 6.06 in
Weight: 2.3 kg

Electric

System power: 27 W
Appliance Class: I

Protection

IP: 66
IK: 07