



Product data sheet

QR0379-LD-12/15W STAINLESS
616-2623
WE-EF

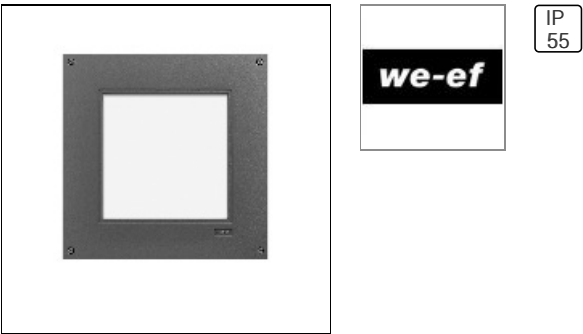

IP55. Recessed LED steplight for orientation. Suitable for installation in cavity wall construction or concrete pour construction using optional installation blockout. Painted finish.

Light output 1

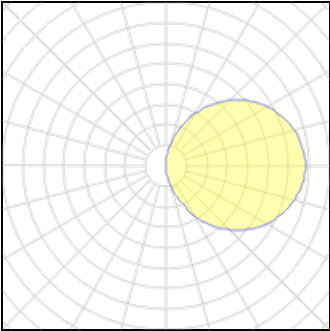

12 x LED			
Nominal lamp power	1 W	LOR	19%
Lamp flux	155 lm	ULOR	9%
Luminous efficacy	23 lm/W	Total flux	345 lm
CCT	3000 K	Total power	15 W
CRI	80		

Mounting mode

Wall recessed

Shape and measurements

Length: 12.68 in
Width: 12.68 in
Height: 6.89 in
Weight: 9.48 kg

Electric

System power: 15 W

Protection

IP: 55