



# Product data sheet

VFL530 [P65] IP66:LED-24/48W/4K  
108-1559  
WE-EF

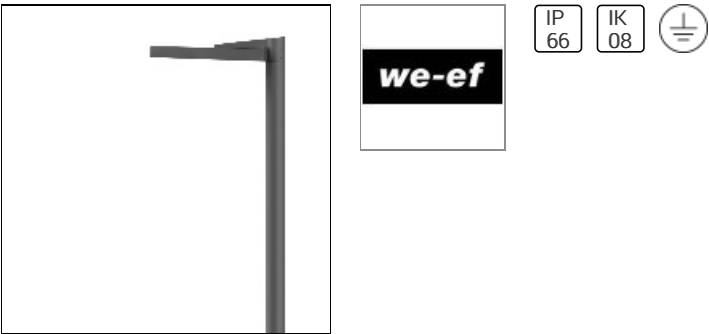

IP66, Class I or Class II. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. RFC® Reflection Free Contour main lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation. Recommended mounting height 3.0-6.0 m, depending on lamp type selected.

## Light output 1



|                    |          |             |         |
|--------------------|----------|-------------|---------|
| 24 x LED           |          |             |         |
| Nominal lamp power | 2 W      | LOR         | 90%     |
| Lamp flux          | 310 lm   | Total flux  | 6675 lm |
| Luminous efficacy  | 124 lm/W | Total power | 54 W    |
| CCT                | 4000 K   |             |         |
| CRI                | 80       |             |         |

## Mounting mode

Pole integrated

## Shape and measurements

Length: 18.50 in  
Width: 12.99 in  
Height: 4.49 in  
Weight: 6.6 kg

## Electric

System power: 54 W  
Appliance Class: I

## Protection

IP: 66  
IK: 08