



Product data sheet

EMERGENCY LIGHTING
V1-EM-00432-21AT0-4000365 ADVANCED SERIES LOW LEVEL IP EM 3H TELETST
VARTON

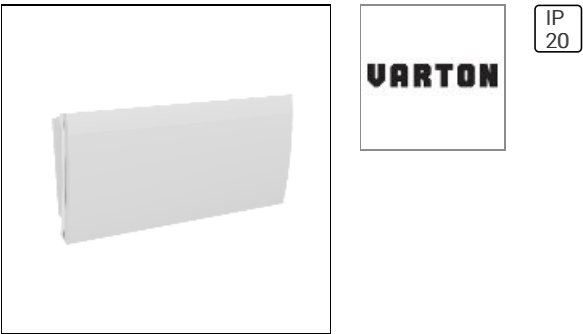

Rated ambient temperature according to IEC62722-2-1, °C: 0...45 Input voltage (AC, 50Hz), V: 220...240 AC frequency, Hz: 50 Emergency operation time, h: 3 <https://www.varton.ru/products/avariyno-evakuatsionnye-resheniya/avariyno-evakuatsionnye-svetilniki-ukazateli-advanced-seriya/avariyno-evakuatsionnaya-seriya-advanced-s-nizkoy-stepenyu-ip/svetovoy-ukazatel-varton-vision-serii-advanced-3w-ip20-3ch-teletest/>

Light output 1



1 x LED			
Nominal lamp power	3 W	LOR	100%
Lamp flux	80 lm	Total flux	80 lm
Luminous efficacy	27 lm/W	Total power	3 W
CCT	6000 K		
CRI	80		

Mounting mode

Ceiling mounted

Shape and measurements

Length: 13.19 in
Width: 5.91 in
Height: 2.95 in

Adjustability

Fixed

Electric

System power: 3 W

Protection

IP: 20