



Product data sheet

ETC310-FS [M] VA:IP67:LED-3/6W/4K + IO-20°
185-9929
WE-EF

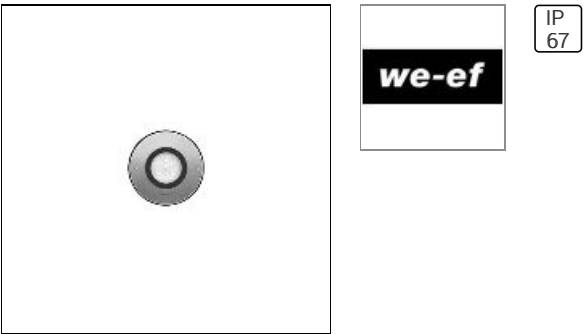

IP67. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 0.5 m of flexible PVC-free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. 1-10 V analogue dimming or DALI interface (where applicable) available on request. Luminaire installation blackout and sealable junction box included in supply.

Light output 1



3 x LED			
Nominal lamp power	2 W	LOR	53%
Lamp flux	246 lm	ULOR	53%
Luminous efficacy	50 lm/W	Total flux	389 lm
CCT	4000 K	Total power	7.7 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Height: 3.94 in
Diameter: 3.74 in

Electric

System power: 7.7 W

Protection

IP: 67