



# Product data sheet

HIPAK PRO IP40 LED13500-740 HFIS-X E3 RK  
96665228  
THORN LIGHTING

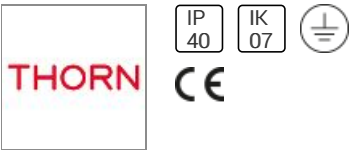


A LED High Bay luminaire with rack distribution. Electronic, DALI dimmable control gear with 3 hour, manual test, LED emergency lighting circuit. Class I electrical, IP40, IK07. Housing: anodised aluminium extrusion. End caps: painted steel (close to RAL 9006). Reflector: high grade aluminium. Front cover: plastic. Mounting kits to be ordered separately. Electrical connection via piano key terminal block behind sliding cover. Equipped with daylight and presence detection for dimming control. Complete with 4000K LED. Dimensions: 756 x 271 x 92 mm Total power: 104 W Weight: 8.85 kg

### Light output 1 (emergency)



1 x General service incandescent lamp			
Nominal lamp power	4 W	LOR	100%
Lamp flux	500 lm	Total flux	500 lm
Luminous efficacy	499997 lm/W	Total power	0 W
CCT	3000 K		
CRI	99		

### Light output 2



1 x General service incandescent lamp			
Nominal lamp power	104 W	LOR	100%
Lamp flux	14000 lm	Total flux	14000 lm
Luminous efficacy	135 lm/W	Total power	104 W
CCT	3000 K		
CRI	70		

### Mounting mode

Pendant

### Shape and measurements

Length: 29.76 in  
Width: 10.67 in  
Height: 3.62 in  
Weight: 8.9 kg

### Electric

System power: 104 W  
Voltage: 220-240 V AC  
Controller: DALI  
Appliance Class: I

### Information regarding emergency functions

Supplementary emergency lighting  
Emergency sign: N/A

## Design

Material impression: Aluminum

Color of housing: Silver gray

## Protection

IP: 40

IK: 07

Designation labels: CE