



# Product data sheet

LINE MICRO 250 24V 2700K N  
A3950000N  
ARKOSLIGHT

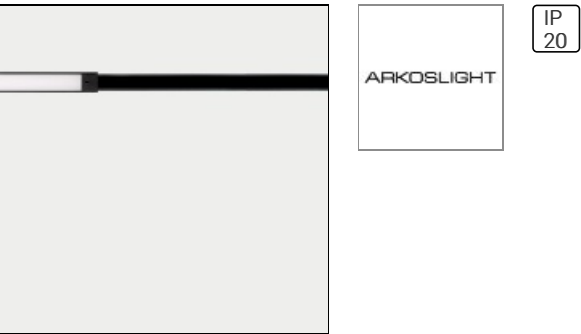

The very thin linear luminaire with diffused light that stands out for its small dimensions and discretion. This lighting solution allows Arkoslight's 24V tracklight to combine accent lighting with longitudinal general lighting where required.

## Light output 1



|                    |          |             |        |
|--------------------|----------|-------------|--------|
| 1 x LED            |          |             |        |
| Nominal lamp power | 2 W      | LOR         | 87%    |
| Lamp flux          | 330 lm   | Total flux  | 287 lm |
| Luminous efficacy  | 165 lm/W | Total power | 2 W    |
| CCT                | 2700 K   |             |        |
| CRI                | 90       |             |        |

## Mounting mode

Ceiling mounted, Contact rail

## Shape and measurements

Length: 0.67 in  
Width: 9.84 in  
Height: 0.98 in

## Adjustability

Fixed

## Design

Designer: Rubén Saldaña

## Electric

System power: 2 W

## Protection

IP: 20