



Product data sheet

KORO MINI SEMI RECESSED TD W - WW - 60DEG
L7KMSRTD06W60
PROLED (MBN GMBH)

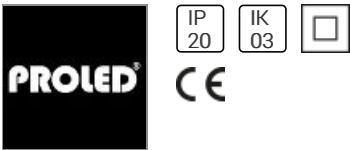


The PROLED KORO MINI SEMI RECESSED downlight brings this light quality into a more compact form factor. Ideal for subtle and precise accent lighting with a reduced diameter. - Compact design for discreet integration - Low glare (UGR < 19) - Twist-n-Lock system

Light output 1



1 x LED			
Nominal lamp power	9 W	LOR	100%
Lamp flux	650 lm	Total flux	650 lm
Luminous efficacy	72 lm/W	Total power	9 W
CCT	3000 K		
CRI	90		



1 x LED			
Nominal lamp power	9 W	LOR	100%
Lamp flux	600 lm	Total flux	600 lm
Luminous efficacy	67 lm/W	Total power	9 W
CCT	3000 K		
CRI	90		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 4.13 in
Diameter: 1.81 in
Weight: 0.265 kg

Adjustability

Rotatable, Tilttable

Glare protection

Glare protection: UGR < 19

Electric

System power: 9 W
Controller: DALI
Appliance Class: II

Protection

IP: 20
IK: 03
Designation labels: CE

Other operating numbers

Ambient temperature range: 14...113°F