



Product data sheet

NOVALINE LED3500-830 HF RF E3 CHR
96644010
THORN LIGHTING

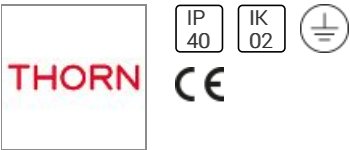


A round bulkhead LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body and bezel: chrome finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With radio frequency module (Slave). Complete with 3000K LED. Dimensions: Ø455 x 105 mm Total power: 32.5 W Luminaire luminous flux: 3200 lm Luminaire efficacy: 98 lm/W Weight: 2.58 kg

Light output 1 (emergency)



1 x General service incandescent lamp			
Nominal lamp power	1 W	LOR	100%
Lamp flux	200 lm	ULOR	4%
Luminous efficacy	199987 lm/W	Total flux	200 lm
CCT	3000 K	Total power	0 W
CRI	80		

Light output 2



1 x General service incandescent lamp			
Nominal lamp power	32 W	LOR	100%
Lamp flux	3200 lm	ULOR	3%
Luminous efficacy	98 lm/W	Total flux	3200 lm
CCT	3000 K	Total power	32.5 W
CRI	80		

Mounting mode

Ceiling mounted

Shape and measurements

Height: 4.13 in
Diameter: 17.91 in
Weight: 2.6 kg

Design

Material impression: Aluminum

Electric

System power: 32.5 W
Voltage: 220-240 V AC
Appliance Class: I

Information regarding emergency functions

Supplementary emergency lighting
Emergency sign: N/A

Protection

IP: 40

IK: 02

Designation labels: CE