



Product data sheet

ISARO 45W HIT-DGE CL1 PC MA60 /L
96261680
THORN LIGHTING

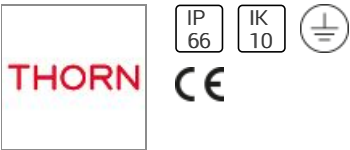

A road and street lantern, designed for durability, for 1 x 45W CPO-TW lamp. Electronic, fixed output control gear. Class I electrical, IP66, IK10. Body: die-cast aluminium, powder coated grey (RAL9006). Bracket: die-cast aluminium, unpainted. Enclosure: shallow polycarbonate. Suitable for post top mounting on Ø60mm spigot or side mounting on Ø49-60mm spigot. Variable tilting in 5° steps, post top: 0° to +10°, lateral: -20° to 0°. Cable gland for Ø8 to 12mm cable. Safe access (automatic disconnection) from above to the gear tray and optical system after quick release of the stainless steel front clip. Delivered, ready to install, in a single carton. Complete with lamp. Total power: 52 W Dimensions: 602 x 282 x 195 mm Weight: 5.32 kg Scx: 0.069 m²

Light output 1



1 x General service incandescent lamp			
Nominal lamp power	45 W	LOR	76%
Lamp flux	4300 lm	Total flux	3283 lm
Luminous efficacy	63 lm/W	Total power	52 W
CCT	3000 K		
CRI	60		

Mounting mode

Pole top mounted

Shape and measurements

Length: 23.70 in
Width: 11.10 in
Height: 7.68 in
Weight: 5.3 kg

Design

Material impression: Aluminum
Color of housing: Silver gray

Electric

System power: 52 W
Appliance Class: I

Protection

IP: 66
IK: 10
Designation labels: CE