



Product data sheet

ETV120 IP67:2LED 60/7,5W/3K [LE]
612-2220
WE-EF

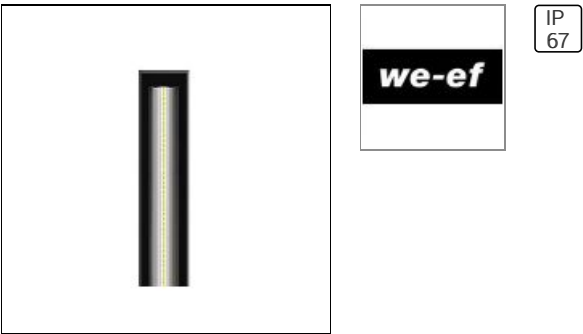

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Light output 1



120 x LED			
Nominal lamp power	0.125 W	LOR	75%
Lamp flux	19 lm	ULOR	75%
Luminous efficacy	86 lm/W	Total flux	1720 lm
CCT	3000 K	Total power	20 W
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Length: 24.69 in
Width: 1.89 in
Height: 1.65 in

Electric

System power: 20 W

Protection

IP: 67