



Product data sheet

OLIVIA-2 MPL 1200 OP 5000 840 IP66 5X2.5 DALI-2
E010310362
ESYLUX

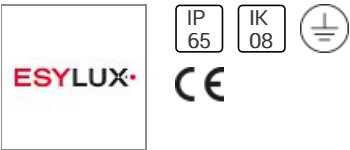

LED Moisture-proof lights with integrated DALI-2-certified drivers, through-wiring and ENEC test symbol Control system: DALI-2 Installation type: Surface mounting Installation position: Ceiling / wall Dimensions: Length 1185 mm x Width 85 mm x Height 86 mm Weight: 1617 g Protection type: IP66 ApplianceClass: Class I Permissible ambient temperature: -20 °C...+45 °C Colour: light grey, similar to RAL 7035 Nominal voltage: 220 - 240 V AC/DC / 50 - 60 Hz TotalSystemPower: 33 W Luminous flux: 5000 lm Luminous efficacy: 151 lm/W Colour temperature: 4000 K Colour rendering index R_a: > 80 Rated lifetime L_{B50} at 25 °C: 102000 h ArticleNumber: E010310362 <https://www.esylux.com/p/E010310362>

Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	33 W	CRI	81
Total flux	5000 lm	LOR	100%
Luminous efficacy	152 lm/W	Total power	33 W

Mounting mode

Ceiling mounted

Shape and measurements

Length: 46.65 in
Width: 3.35 in
Height: 3.39 in

Adjustability

Fixed

Design

Color of housing: Silver gray

Electric

System power: 33 W
Ballast: ECG
Controller: DALI
Appliance Class: I

Protection

IP: 65
IK: 08
Designation labels: CE

Other operating numbers

Ambient temperature range: -4...113°F