


Product data sheet

OLYMPIA DIM DALI 4000K W
A2570042W
ARKOSLIGHT

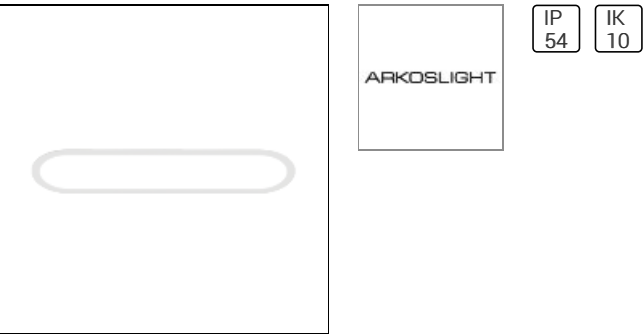

Olympia is a ceiling recessed LED light fitting for general lighting functions. Its geometry represents an evolution in the downlight concept as it is longitudinal in shape rather than the normal circular shape. This feature opens up a whole new range of possibility for architecture and interior design professionals. Its shape permits applying optical effects that enhance the perception of width or length in a space, emphasise itineraries, highlight important features or have an impact on the pace of transit through the room.

Light output 1



| | | | |
|--------------------|----------|-------------|---------|
| 1 x LED | | | |
| Nominal lamp power | 10.5 W | LOR | 67% |
| Lamp flux | 1575 lm | Total flux | 1055 lm |
| Luminous efficacy | 150 lm/W | Total power | 10.5 W |
| CCT | 4000 K | | |
| CRI | 90 | | |

Mounting mode

Ceiling recessed, Wall recessed

Shape and measurements

Length: 11.81 in
Width: 3.27 in
Height: 2.13 in

Adjustability

Fixed

Electric

System power: 10.5 W

Protection

IP: 54
IK: 10