



Product data sheet

QBA 2 150W 230V HIT-CE R/S INT
96012227
THORN LIGHTING

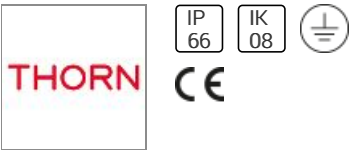

A compact discharge floodlight for architectural lighting with IP66 optical and gear compartment, SC1 class. Grey powder coated die-cast aluminium body with Flat Glass enclosure. Projector is fully adjustable on a short stirrup, locked via central 8mm diameter allen screws. intensive floodlighting distribution with a aluminium - bright anodised reflector. This product is suitable for a 150 W HIT-CE lamp. Available in other colours as special (any RAL number, brick brown or pale sand). Dimensions: 227 x 219 x 145 mm Weight: 6.1 kg

Light output 1



1 x General service incandescent lamp			
Nominal lamp power	150 W	LOR	64%
Lamp flux	14000 lm	Total flux	8992 lm
Luminous efficacy	53 lm/W	Total power	170 W
CCT	3000 K		
CRI	80		

Mounting mode

Ceiling mounted

Shape and measurements

Length: 8.94 in
Width: 8.62 in
Height: 5.71 in
Weight: 6.1 kg

Design

Material impression: Aluminum

Electric

System power: 170 W
Voltage: 230-240 V AC
Appliance Class: I

Protection

IP: 66
IK: 08
Designation labels: CE