



Product data sheet

MINI FLAT DRIFT
7024-0-5-803-XX
UNILAMP

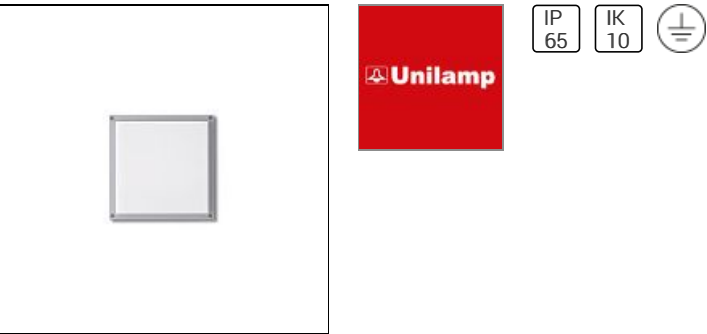

Description Square in shape DRIFT wall and ceiling lights have a robust aluminium construction and impact resistant polycarbonate diffuser cover. DRIFT with LED unit is also available with built-in microwave sensor and hi-low light function. The high protection rating of IP65 and IK09 allows DRIFT to be installed in the harshest outdoor environments. With the diffused light distribution, it provides good low glare general lighting to private and public areas. The front cover is available in various designs; moreover, DRIFT is available in 2 sizes with the choice of 5 different colors. • Designed, Manufactured and tested according to IEC 60598-1, IEC 60598-2-1 and VDE regulations. • LM6 Die Cast Aluminium body. • Stainless steel screws. • Nano Ceramic surface conversion. • Double layer coating. • Polycarbonate diffuser. • Post-cured silicone gasket. • High quality LED module and driver. Replaceable for future upgrade. • Optional with motion detector (Microwave Sensor). • Quick connector for easy installation. • Installation work has to be carried on according to the enclosed product manual.

Light output 1



| | | | |
|--------------------|----------|-------------|--------|
| 1 x LED | | | |
| Nominal lamp power | 11 W | LOR | 63% |
| Lamp flux | 1130 lm | Total flux | 708 lm |
| Luminous efficacy | 103 lm/W | Total power | 12 W |
| CCT | 3000 K | | |
| CRI | 80 | | |

Mounting mode

Wall mounted

Shape and measurements

Length: 10.63 in

Width: 2.43 in

Height: 10.63 in

Adjustability

Fixed

Electric

System power: 12 W

Controller: DALI

Appliance Class: I

Protection

IP: 65

IK: 10