



Product data sheet

SLS410 [A60] IP66:LED-3/13W/3K
131-0232
WE-EF

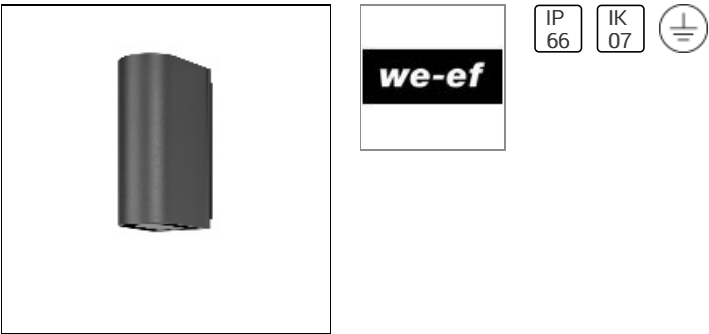

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request.

Light output 1



3 x LED			
Nominal lamp power	4.3 W	LOR	69%
Lamp flux	550 lm	Total flux	1140 lm
Luminous efficacy	72 lm/W	Total power	15.8 W
CCT	3000 K		
CRI	80		

Mounting mode

Wall mounted

Shape and measurements

Length: 4.13 in
Width: 10.04 in
Height: 6.69 in
Weight: 3.3 kg

Electric

System power: 15.8 W
Appliance Class: I

Protection

IP: 66
IK: 07