



Product data sheet

EFACT C1 5L90 ACC 28D BLU RS SF
96271737
THORN LIGHTING

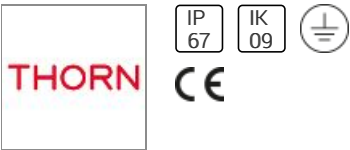

A medium square ground recessed luminaire. 5 LED(s) driven at 900mA by integral driver, 28° beam angle for walkover guidance applications. Body: die-cast aluminium with powdered paint finish. Frame: stainless steel, 2mm thick. Front glass: semi-frosted toughened sodic glass, 10mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with blue LED Dimensions: 186 x 186 x 202 mm Total power: 16 W Luminaire luminous flux: 161 lm Luminaire efficacy: 10 lm/W Weight: 4.02 kg

Light output 1 (integrated)



Lamp type	LED	CCT	3000 K
Nominal lamp power	16 W	CRI	80
Total flux	161 lm	LOR	100%
Luminous efficacy	10 lm/W	ULOR	100%
		Total power	16 W

Mounting mode

Floor recessed

Shape and measurements

Length: 7.32 in
Width: 7.32 in
Height: 7.95 in
Weight: 4 kg

Design

Material impression: Aluminum

Electric

System power: 16 W
Voltage: 230 V AC
Appliance Class: I

Protection

IP: 67
IK: 09
Designation labels: CE