



Product data sheet

MATRIC 38MM SURFACE - A1
LA1FEE-840H-L1182
LIGHTNET

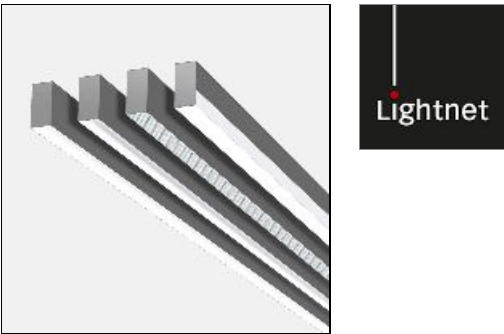

LED surface-mounted luminaire. Direct only light distribution. Light channel made of aluminium profile with 38mm track width. Precise length production according to specifications possible. Surface natural anodised or white, graphite, black, champagne or copper coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction especially for workplaces. Opal diffuser made of acrylic glass and ambient diffuser with omnidirectional light distribution for general lighting. Wallwasher for homogeneous vertical illuminance. Converter integrated into luminaire housing, optionally switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial $\leq$ Mac Adam 3. Colour rendering CRI>80 or CRI>90. On request: Integration of emergency lighting components, sensor technology as well as many other options.

Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	22 W	CRI	82
Total flux	2500 lm	LOR	100%
Luminous efficacy	114 lm/W	ULOR	5%
		Total power	22 W

Mounting mode

Ceiling mounted

Electric

System power: 22 W

Shape and measurements

Length: 46.54 in

Width: 1.50 in

Height: 2.95 in

Protection

Adjustability

Fixed