



# Product data sheet

STL259 IP55:LED-6/6W/4K  
133-0347  
WE-EF

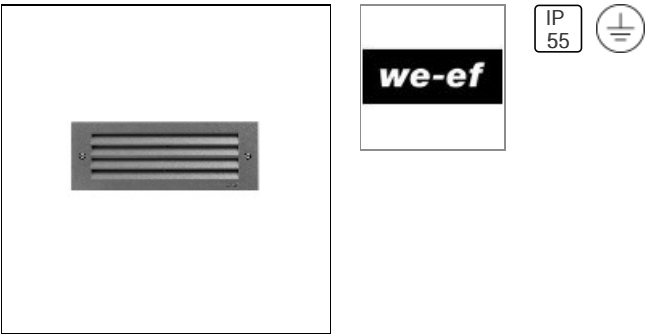

IP55, Class I. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

## Light output 1



6 x LED			
Nominal lamp power	1 W	LOR	3%
Lamp flux	170 lm	Total flux	28 lm
Luminous efficacy	4 lm/W	Total power	7.5 W
CCT	4000 K		
CRI	80		

## Mounting mode

Wall recessed

## Shape and measurements

Length: 9.84 in  
Width: 3.62 in  
Height: 4.25 in  
Weight: 1.3 kg

## Electric

System power: 7.5 W  
Appliance Class: I

## Protection

IP: 55