



Product data sheet

MATRIC 38MM 3-PHASE TRACK - C1
LC10EE-840M-L890
LIGHTNET

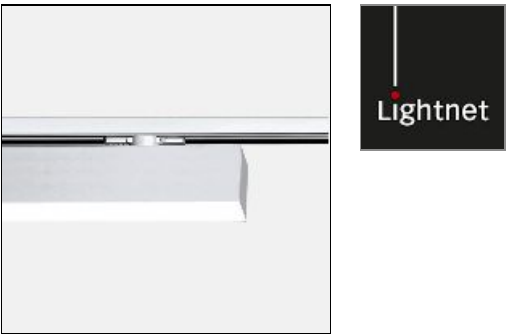

LED surface-mounted luminaire for 3-phase tracks. Direct only light distribution. Light channel made of aluminium profile with 38mm profile width. Precise length production according to specifications possible. Surface natural anodised or white, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction especially for workplaces. Opal diffuser made of acrylic glass and ambient diffuser with omnidirectional light distribution for general lighting. Wallwasher for homogeneous vertical illuminance. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperatures 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning initial \leq MacAdam 3. Colour rendering CRI>80 or CRI>90. Track adapter optionally EUTRAC or GLOBAL.

Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	16 W	CRI	82
Total flux	1420 lm	LOR	100%
Luminous efficacy	89 lm/W	Total power	16 W

Mounting mode

Ceiling mounted

Electric

System power: 16 W

Shape and measurements

Length: 35.04 in
Width: 1.50 in
Height: 2.95 in

Protection

Adjustability

Fixed