



# Product data sheet

FUTURA 2.5FT HE PC AL 16000/840 3F  
11043  
TREVOS

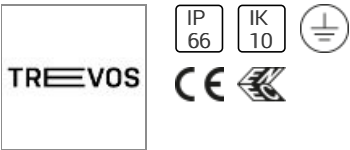

unique design, resistant against humidity and dust, with IP66 enclosure rating and built-in aluminium heat sinks; high-efficiency light fitting with sulphur-resistant LED modules; optimal mounting height: 3.5 to 10 m; ON/OFF electronic driver (AC, DC on demand); Body: grey PC (high mechanical resistance, UV stability, RAL 7035); Diffuser: translucent PC (high mechanical resistance, UV stability); Reflector: steel sheet, white (RAL 9003); Clips: polyamide + 15 % fibreglass; Sealing: polyurethane (PUR), foam-filled base groove; Connection: screwless five-pole terminal block, 5-wire connecting cabling for feed-through installation (1.5 mm2 cross-section, 2.5 mm2 available on demand); Power: 101,2 W; Luminaire flux: 18240 lm; Lifetime: L90/B10; 50000 hours; Impact strength: IK10; Ambient temperature: -25/35 °C; Weight: 3,25 kg;

## Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	101.2 W	CRI	80
Total flux	19400 lm	LOR	100%
Luminous efficacy	192 lm/W	ULOR	4%
		Total power	101.2 W

## Mounting mode

Ceiling mounted

## Shape and measurements

Length: 57.17 in

Width: 5.71 in

Height: 4.41 in

## Adjustability

Fixed

## Design

Material impression: Plastic

Color of housing: Silver gray, White

Designer: TREVOS

## Electric

System power: 101.2 W

Ballast: ECG

Appliance Class: I

## Protection

IP: 66

IK: 10

Designation labels: CE, ENEC

## Other operating numbers

Ambient temperature range: -13...95°F