



# Product data sheet

LDP0103503B840--JIAII-DIRECT-3012-35W-4000K-NORMAL  
542003048200  
OPPLE

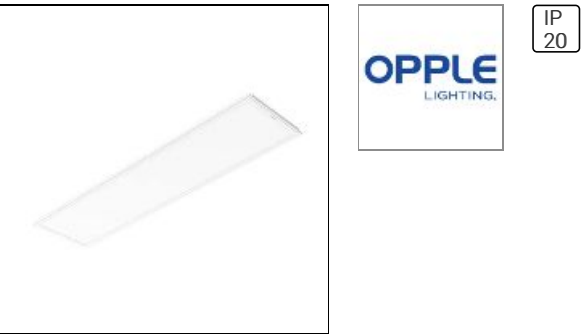

Housing:Aluminium; Installation: recessed mounted; Dimensions:295\*1195\*35mm; Ceiling cououts:270\*1170mm Power:35W; Power factor:0.95; Efficacy : 110Lm/w; Colour temperature:4000K; Colour rendering:RA>80; Total luminous flux of luminaire:3850Lm; SDIM:<5; UGR:<22 Service life:50,000h; Degree of protection:IP20; Class of protection:I;

## Light output 1 (integrated)



Lamp type	LED	CCT	4000 K
Nominal lamp power	35 W	CRI	80
Total flux	3850 lm	LOR	100%
Luminous efficacy	110 lm/W	Total power	35 W

## Mounting mode

Ceiling recessed

## Shape and measurements

Length: 47.05 in  
Width: 11.61 in  
Height: 1.38 in

## Adjustability

Fixed

## Electric

System power: 35 W

## Protection

IP: 20