



Product data sheet

PANEL INDIVILED® EMERGENCY 600 33 W 3000K
4058075201293
LEDVANCE

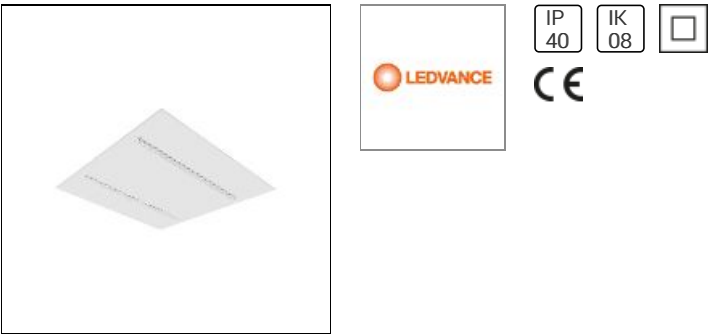

Square recessed luminaire with IndiviLED® optics, self-contained emergency luminaire, 600mm. Product features: Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution. Luminaire suited for normal lighting and emergency lighting. Certified according to European norms (EN 60598-1:2015; EN 60598-2-22:2014). Self-contained luminaires. Emergency lighting function: battery discharge time of 3 h. Function test of emergency lighting: automatic (AT). Battery technology: LiFePO4. Metal housing, polycarbonate (PC) lenses and reflectors. Luminous efficacy: up to 120 lm/W. Initial color consistency: 3 SDCM. Glow Wire Test according to IEC 60695-2-12: 850 °C. Product benefits: Homogenous light distribution and reduced glare thanks to the IndiviLED® optics. Seamless integration of luminaires with emergency lighting function into general lighting. Easy wiring thanks to included prewired driver and battery for Emergency lighting function. Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function. Convenient visualization of results of automatic test with an included control LED. Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time. Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps). Robust structure with IK08. Low flicker light thanks to special electronic control gear. 3 years guarantee. Areas of application: Direct replacement for luminaires with fluorescent lamps. Emergency illumination of escape routes. Antipanic lighting. Buildings requiring up to 3 h emergency light operation. Reception areas, foyers, corridors, elevators. Offices, conference rooms. Suitable for recessed ceiling systems with grid size of 600 x 600 mm. Equipment / Accessories: Optional mounting clips available. Security rope for luminaire included. External control gear included. Control LED with a retainer for recessed installation included.

Light output 1 (integrated, emergency)



Lamp type	LED	CCT	3000 K
Nominal lamp power	33 W	CRI	80
Total flux	3800 lm	LOR	100%
Luminous efficacy	115 lm/W	Total power	33 W

Mounting mode

Ceiling mounted

Shape and measurements

Length: 23.43 in

Width: 23.43 in

Height: 0.51 in

Weight: 3.7 kg

Adjustability

Fixed

Electric

System power: 33 W

Appliance Class: II

Information regarding emergency functions

Emergency lighting only

Emergency sign: N/A

Design

Material impression: Stainless steel

Color of housing: White

Protection

IP: 40

IK: 08

Designation labels: CE

Other operating numbers

Ambient temperature range: 41...104°F