



# Product data sheet

DUROLIGHT-C LED3800-840 HF E3 L1215  
96630914  
THORN LIGHTING

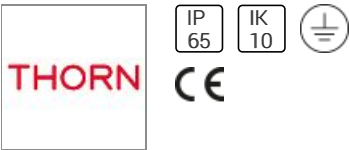

Anti-vandal surface mounted cornice LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED Dimensions: 1215 x 175 x 175 mm Total power: 42.2 W Luminaire luminous flux: 3788 lm Luminaire efficacy: 90 lm/W Weight: 11 kg

## Light output 1 (integrated)



|                    |         |             |        |
|--------------------|---------|-------------|--------|
| Lamp type          | LED     | CCT         | 3000 K |
| Nominal lamp power | 42.2 W  | CRI         | 80     |
| Total flux         | 3792 lm | LOR         | 100%   |
| Luminous efficacy  | 90 lm/W | ULOR        | 13%    |
|                    |         | Total power | 42.2 W |

## Mounting mode

Ceiling mounted

## Shape and measurements

Length: 47.83 in  
Width: 6.89 in  
Height: 6.89 in  
Weight: 11 kg

## Design

Color of housing: White

## Electric

System power: 42.2 W  
Voltage: 220-240 V AC  
Appliance Class: I

## Protection

IP: 65  
IK: 10  
Designation labels: CE