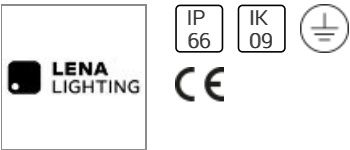# Product data sheet

INDUSTRY SLIM LED 590MM 7550LM 850 IP66 120D LS2 (47W)
935268

LENA LIGHTING

| IP 66 | IK 09 |

CE

INDUSTRY SLIM LED 590mm 7550lm 850 IP66 120D LS2 (47W) Industry Slim Led - a sealed, aluminum luminaire of compact dimensions. A completely new industrial luminaire. Extremely short (590 mm), the luminaire has a high luminous flux and a very high luminous efficiency, which makes this luminaire highly energy-saving and ecological. It is distinguished by a very high IP66 tightness. It owes this tightness to its well-thought-out design. The polycarbonate diffuser is permanently attached to the housing with a durable silicone gasket. This means that in addition to the tightness obtained in this way, the light module is protected against uncontrolled interference and access to the LEDs. The tightness of the lamp is ensured by a gland, which tightens the gasket and prevents the ingress of dust, moisture, and water. Industry Slim Led allows for suspended or surface mounting. The luminaire is designed to illuminate industrial and warehouse facilities, due to its minimal dimensions, also in hard-to-reach places. The Industry Slim Led luminaire is available in various versions: with different optics, wide, narrow, and dedicated to high-bay light distribution, and five types of the diffuser, including an anti-glare diffuser.

Light output 1 (integrated)

Lamp type	LED	CCT	5000 K
Nominal lamp power	47 W	CRI	80
Total flux	7550 lm	LOR	90%
Luminous efficacy	161 lm/W	Total power	47 W

Mounting mode

Pendant, Ceiling mounted

Shape and measurements

Length: 23.23 in
Width: 1.97 in
Height: 2.56 in

Adjustability

Fixed

Design

Material impression: Matt
Color of housing: White

Electric

System power: 47 W
Ballast: ECG
Suitable for feed-through wiring
Appliance Class: I

Protection

IP: 66
IK: 09
Designation labels: CE

Other operating numbers

Ambient temperature range: -13...95°F