



Product data sheet

ETC119 VA:IP68:LED-1/1W/4K
185-2844
WE-EF

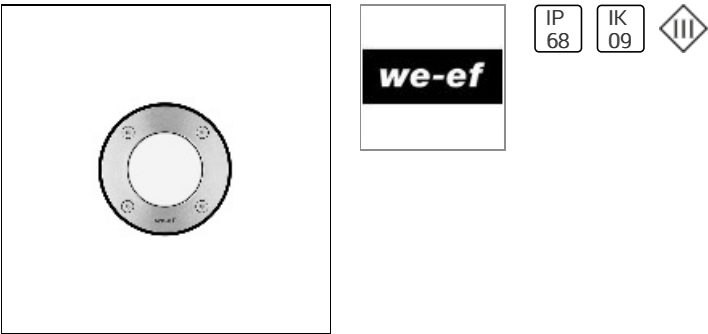

IP67. Class III. IK09. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement. Factory installed LED circuit board. LED boards can be easily removed for upgrading. Luminaire requires installation blockout. To be ordered separately.

Light output 1



1 x LED			
Nominal lamp power	1 W	LOR	69%
Lamp flux	170 lm	Total flux	117 lm
Luminous efficacy	117 lm/W	Total power	1 W
CCT	4000 K		
CRI	80		

Mounting mode

Floor recessed

Shape and measurements

Height: 3.94 in
Diameter: 3.74 in
Weight: 1 kg

Electric

System power: 1 W
Appliance Class: III

Protection

IP: 68
IK: 09