



Product data sheet

DOC240-GB [M] IP66:LED-12/18W/4K
134-1254
WE-EF

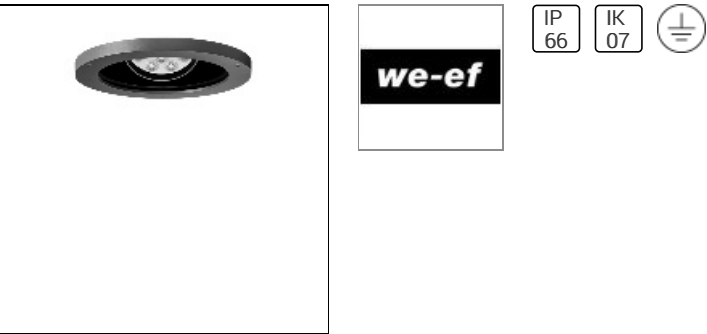

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. Gimbal mounted, 30° tiltable and 355° rotatable. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

Light output 1



12 x LED			
Nominal lamp power	1.5 W	LOR	86%
Lamp flux	230 lm	Total flux	2377 lm
Luminous efficacy	113 lm/W	Total power	21 W
CCT	4000 K		
CRI	80		

Mounting mode

Ceiling recessed

Shape and measurements

Height: 8.74 in
Diameter: 9.84 in
Weight: 5.5 kg

Electric

System power: 21 W
Appliance Class: I

Information regarding emergency functions

Supplementary emergency lighting
Emergency sign: N/A

Protection

IP: 66
IK: 07