



Product data sheet

LTC-3SQD-P-06L35K8VNR-DM1-S-BL
CURRENT

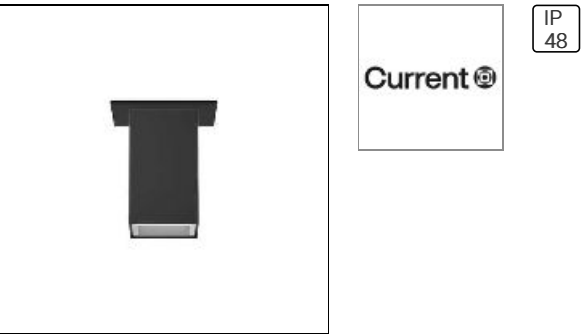

LITEISTRY™ offers a broad palette of architectural downlighting solutions with consistent aperture appearance, quiet ceiling design, and optical performance. 3" architectural LED square downlight cylinder delivering 600 - 2000 lm, Available with SpectraSync™ Tunable White and Dim-to-Warm options, NX Lighting Controls™, wired and wireless capability available, Quiet reflector appearance with 50° optical cutoff, Available in Surface, Wall, Pendant, or Cable/Cord Mount configurations, Versatile canopy options for recessed and surface-mounted J-box applications,

Light output 1 (integrated)

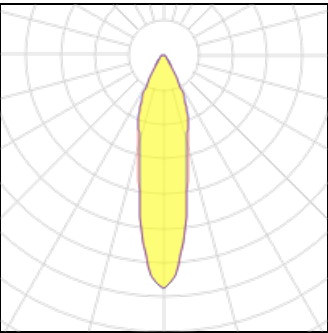

Lamp type	LED	CCT	3500 K
Nominal lamp power	7.88 W	CRI	80
Total flux	633 lm	LOR	100%
Luminous efficacy	80 lm/W	Total power	7.88 W

Mounting mode

Ceiling mounted, Pendant

Shape and measurements

Length: 2.87 in
Width: 2.87 in
Height: 3.94 in

Adjustability

Fixed

Electric

System power: 7.88 W

Protection

IP: 48