



# Product data sheet

RFL530-SE [S65] IP66:LED-24/24W/3K  
111-0463  
WE-EF

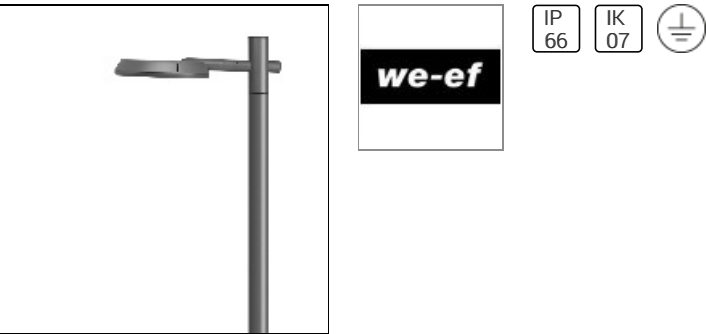

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Non-reflecting safety glass lens, hinged with safety switch. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

## Light output 1



24 x LED			
Nominal lamp power	1 W	LOR	93%
Lamp flux	155 lm	Total flux	3452 lm
Luminous efficacy	130 lm/W	Total power	26.5 W
CCT	3000 K		
CRI	80		

## Mounting mode

Pole integrated

## Shape and measurements

Height: 3.15 in  
Diameter: 18.11 in  
Weight: 9.3 kg

## Electric

System power: 26.5 W  
Appliance Class: I

## Protection

IP: 66  
IK: 07