



Product data sheet

FIL45 SUR 1120 4000 WW D/I OP COMF WH.
F41SF112MOIP830NW
LAMP

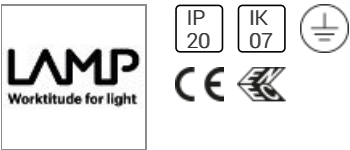

Suspended or mounted surface structure model FIL45 SUR 1120 4000 NW D/I OP COMF BK., LAMP brand. Made of extruded aluminium painted in matt black. Indirect-direct light. With OP COMFatic polycarbonate diffuser. Model for LED MID-POWER, neutral white color temperature and control gear included. With IP20, IK07 protection rating. Insulation class I. Photobiological safety group 0.

Light output 1



1 x LED			
Nominal lamp power	28.3 W	LOR	100%
Lamp flux	2525 lm	ULOR	31%
Luminous efficacy	89 lm/W	Total flux	2525 lm
CCT	3000 K	Total power	28.3 W
CRI	80		

Mounting mode

Pendant, Ceiling mounted

Shape and measurements

Length: 50.08 in
Width: 3.74 in
Height: 3.94 in

Adjustability

Fixed

Design

Material impression: Plastic
Designer: TREVOS

Electric

System power: 28.3 W
Ballast: ECG
Controller: DALI
Appliance Class: I

Protection

IP: 20
IK: 07
Designation labels: CE, ENEC

Other operating numbers

Ambient temperature range: -13...104°F