



Product data sheet

CRR224 [A] IP65:HIT-TC-CE 20W/GU6.5
134-9281
WE-EF

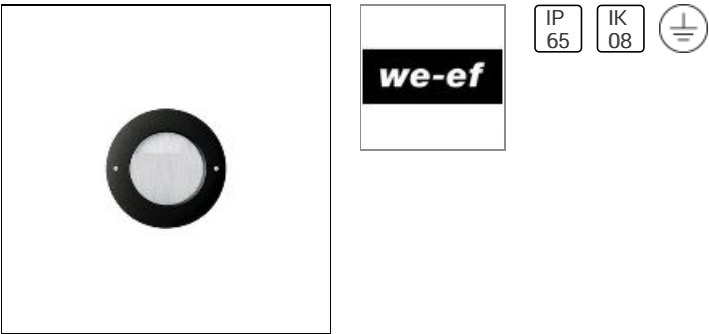

IP65, Class I. IK08. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection. Silicone rubber gasket. Safety glass lens. Two cable entries. Stud wall/niche mounted version features concealed stainless steel mounting claws.

Light output 1



1 x Metal halide lamp			
Nominal lamp power	20 W	LOR	41%
Lamp flux	1800 lm	ULOR	10%
Luminous efficacy	34 lm/W	Total flux	742 lm
CCT	3000 K	Total power	22 W
CRI	85		

Mounting mode

Wall recessed

Shape and measurements

Height: 5.91 in
Diameter: 7.68 in

Electric

System power: 22 W
Appliance Class: I

Protection

IP: 65
IK: 08